

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
8 November 2001 (08.11.2001)

PCT

(10) International Publication Number
WO 01/84475 A1

(51) International Patent Classification⁷: **G06K 7/10**

(21) International Application Number: PCT/US01/13742

(22) International Filing Date: 30 April 2001 (30.04.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/201,471 3 May 2000 (03.05.2000) US
60/256,086 15 December 2000 (15.12.2000) US

(71) Applicant and

(72) Inventor: **REIFFEL, Leonard** [US/US]; 602 Deming
Place, Chicago, IL 60605 (US).

(74) Agent: **MOYER, Donald**; 431 S Dearborn 705, Chicago,
IL 60605 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CI, CN, CR, CU, CZ,

DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: DUAL MODE DATA IMAGING PRODUCT

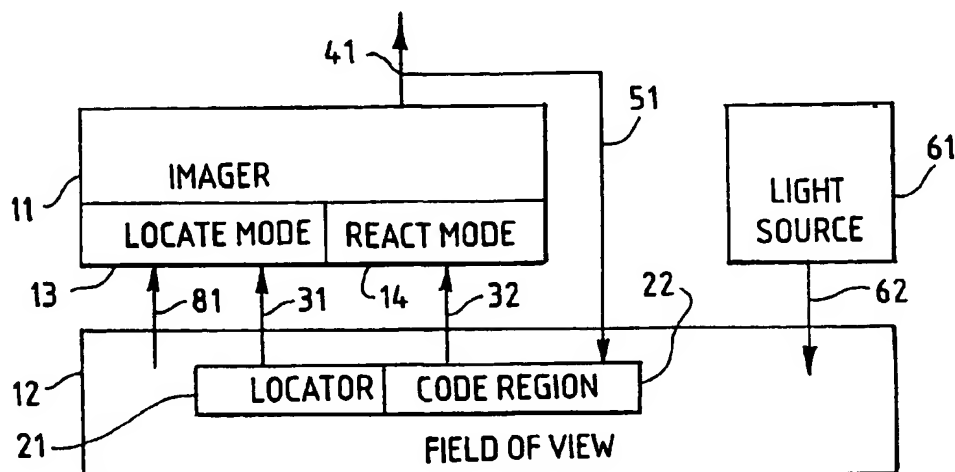

(57) Abstract: An imager (11) has a locate mode (13) which detects light (31A, 31B) having a preset light property from at least one locator (21) in the imager field of view (12); and has a react mode which is caused by the locate mode to select light from a code region (22, 32A, 32B, 33B) over light not from the code region (81) and which outputs a signal (41) representing code in the code region.

WO 01/84475 A1

DUAL MODE DATA IMAGING PRODUCT

WRITTEN DESCRIPTION

[0001] This application claims benefit of US provisional application 60/201,471 filed
5 03 May 2000 and US provisional application 60/256,086 filed 15 December 2000.

[0002] The dual mode product has an imager having a locate mode and a react mode.
The locate mode detects a locator. A code region corresponds to the locator. Data is
located in the code region. The react mode is caused by the locate mode to select light
from the code region over light not from the code region. The react mode outputs a
10 signal representing the data.

[0003] The dual mode product helps solve problems with locating and reacting to
data sources in complex, changing environments. Because the react mode can ignore
everything in the field of view except the code region, and because the output signal
from the react mode can represent code without forming an image of the code, the
15 dual mode product provides a low data processing burden solution to the problems.

[0004] For example, a locator can be two bands on a tag which retro reflect infrared
light. The retro-reflected light is detected by the locate mode. The corresponding
code region is the region on the tag between the two retro-reflecting bands. A code
can be a particular sequence of color bands in this space. The react mode detects the
20 sequence of color bands and outputs a signal representing the code.

[0005] The dual mode product can be used with the multi-source, multi-imager,
multi-use product described in US provisional application 60/256,086 and in PCT
patent application US/ PCT/US00/00000. Examples here of using the dual mode
product with this multi-use product are illustrative only. The dual mode product has
25 many applications and is thus independent of any specific application.

[0006] In one example of use, tags can be connected to each container in a pharmacy,
with a code region of each tag containing data which identifies the corresponding
pharmacy container. Signals output by dual mode product can cause an information

system to register the specific location of each specific pharmacy container at all times.

5 [0007] In a second example, a tag can be connected to a robot, with a code region on the tag containing data identifying the robot. Signals from the dual mode product can cause the information system to guide the robot through a complex, changing environment, for example to fetch a specific pharmacy container.

[0008] In a third example, a tag with a code region can be moved by a person, with the positions of the code region in the field of view being data. Signals from the dual mode product can cause functioning of a cursor in a computer display corresponding to the functioning caused by a computer mouse or equivalent input device.

10 [0009] In a fourth example, a tag can have a code region containing data instructing imagers to detect things such as the length of indicating fluid in a thermometer and such as the volume of material poured from a pharmacy container. Signals from the dual mode product can cause an information system to control heat flow to keep the temperature at a preset value and to stop flow of material from a pharmacy container after a preset volume has poured.

[0010] The invention provides progress over prior art shown for example in U. S. patents 5912700 by Honey 15 June 1999, 4998441 by Stuart 12 March 1991, 4099050 by Sauermann 04 July 1978, and 4053233 by Bein 11 October 1977.

20 [0011] FIG. 1 depicts the product schematically.

[0012] FIG. 2 depicts light from an imager field of view.

[0013] FIG. 3 depicts locate light from the field of view.

[0014] FIG. 4 depicts code light from the field of view.

[0015] The dual mode product - schematically depicted in FIG. 1 - comprises an imager 11 having a field of view 12 extending in each of three orthogonal directions. The product also comprises a locator 21 in the field of view.

[0016] Locate light 31 from the locator has a locate light property which has a preset value. A code region 22 corresponds to the locator. Code is located in the code

region. Code light 32 from the code region represents the code. Code can be any data which can be used by an information system.

- [0017] The locate light property can comprise various physical properties of light in fixed, variable, and modulated modes. These physical properties of light comprise intensities, frequencies, phases, polarizations, entanglements, blink rates, decay times, external shapes, internal shapes, linear motions, rotational motions, strain motions, distances from at least one reference point, and combinations of two and more physical properties such as these. Code can also be represented by a pattern comprising these physical properties in fixed, variable, and modulated modes.
- 10 [0018] The imager has a locate mode 13 which detects the locate light and detects the locate light property. The locate mode matches the locate light property detected to the preset value. "Match" can mean being in a range about the preset value, being greater than the preset value, and being less than the preset value. The locate light property and the preset value of the locate light property are devised so that
- 15 properties of light not from the locator detected by the locate mode do not match the preset value.

[0019] The imager has a react mode 14. The locate mode causes the react mode to select code light 32 over light 81 not from the code region and to detect code light when the locate light property detected by the locate mode matches the preset value.

- 20 [0020] The react mode outputs a code signal 41 which represents the code. The code signal can have any form which can be used by an information system. The code signal need not be an image of the code region. The code signal need only represent the code in a form which can be used by an information system.

[0021] The code signal can cause a loop signal 51 to interact with an agent associated with the code. An agent associated with the code can be a being or a device. An agent can be identified by the code. An agent can change the code. The loop signal can be electrical, photonic, visual, audible, tactile, and any other form useful to the being or device comprising the agent.

25

[0022] For example, a person can change the position of a code region in the field of view. The loop signal can be a display of a cursor tracking the positions of the code region. In another example, a device can be controlling a process. The code can indicate the value of a property (temperature for example) of the process. The loop
5 signal can be input to the control device. The control device can use the loop signal to change the process accordingly.

[0023] Locate light from the locator and code light from the code region can have various sources such as: light reflected from ambient sources; a locator light source; a code light source; light emitted after energizing by suitable radiation; light emitted
10 after energizing by suitable radiation with a characteristic decay time; a light source 61 adjacent to the imager illuminating 62 the locator; a light source 61 adjacent to the imager illuminating 62 the code region; and combinations of two and more of these.

[0024] Locate light and code light are not limited to visible light. For example, infrared can be used, and millimeter and longer wavelengths can be used. Locate
15 light and code light can be radiating energy from any portion of the electromagnetic spectrum which can provide the functions required here. Other forms of radiating energy - such as acoustic energy - which can provide the functions required here are included in the meaning of "light" here.

[0025] The several causal connections here - for example, locate mode to react mode, react mode to code signal, code signal to loop signal, loop signal to agent - can act via
20 any of various modes of processing. The processing can utilize configured processing elements such as hard wired circuits, can utilize configurable processing elements such as field programmable gate arrays and neural networks, can utilize instructions in a data-bearing medium, and can utilize combinations of these. The processing can
25 act by itself, can act via an information system, and can act via combinations of these. The processing - in part at least - can be a part of the imager.

[0026] There can be a plurality of locators. Each Cth locator in the plurality of locators is identified here by the index integer C running from one to the total number of locators in the plurality of locators. The corresponding locate light, the corresponding

code region, the corresponding code, and the corresponding code light are also identified here by the same index integer.

[0027] Each Cth locator is in the field of view. Cth locate light emanates from each Cth locator. Cth locate light emanating from each Cth locator has a locate light
5 property. The locate light property has a preset value. The locate light property and the preset value of the locate light property are devised so that properties of light not from the locator detected by the locate mode do not match the preset value.

[0028] A plurality of code regions corresponds member-by member to the plurality of locators. Cth code light emanates from each corresponding Cth code region. In the
10 example depicted in FIG. 2, FIG. 3, and FIG. 4, C1 code light 32A from a C1 code region corresponds to C1 locate light 31A from a C1 locator, and C2 code light 32B from a C2 code region corresponds to C2 locate light 31B from a C2 locator.

[0029] In this example, C1 locate light 31A and C2 locate light 31B each comprise a pair of bands of retro-reflected infrared light. Spurious retro-reflected infrared light
15 81A is also present. The corresponding code regions here are the region between two bands of retro-reflected infrared light.

[0030] Many other conventions by which a code region corresponds to a locator can be adopted. A code region can be a region displaced from a locator by a factor. A code region can overlap the locator. The code region can be coextensive with the
20 locator, with, for example, the locator monochromatically retro reflecting infrared light and the code region reflecting a chromatic pattern of visible light. In all cases the code light and the locate light are detected separately, and the code light properties do not match the preset value of the locate light property.

[0031] The locate light property here combines intensity (retro-reflected), frequency
25 (infrared), and shape (two bands). While spurious light may share some of these physical properties, spurious light is highly unlikely to share all the physical properties of the combination comprising the locate light property.

[0032] The preset value of the locate light property in this example comprises light from two sources closer than a minimum distance, having an intensity greater than a

minimum intensity, with a frequency in the infrared region. Light not from the locator detected by the locate mode does not match this preset value.

[0033] Each Cth code light represents a corresponding Cth code. At least one first code from the plurality of codes can be different from at least one second code from the plurality of codes. Every code from the plurality of codes can be different from all the other codes from the plurality of codes.

[0034] Code light 32A, 32B depicted in the figures emanates from color bands - blue, green, yellow, orange in the 31A code region - and orange, blue, yellow, green in the 31B code region. Here the codes are the color band sequences imparting data according to a pre-established convention.

[0035] Code light can comprise any patterns of the physical properties of light listed above which can be detected by the react mode. Codes can comprise any pattern sequences which can impart data according to some pre-established convention.

[0036] The locate mode of the imager causes the react mode to select each Cth code light over light not from the Cth code region and to detect each Cth code light when the locate light property of the corresponding Cth locate light detected by the locate mode matches the preset value. The react mode outputs a code signal which represents each Cth code light and thus represents each Cth code from the plurality of codes.

[0037] At least one agent can be associated with at least one agent code from the plurality of codes. An agent can be a being and can be a device. An agent can be identified by the agent code. An agent can change the agent code. The code signal can cause a loop signal to interact with the agent. The loop signal can interact by electrical, photonic, visible, audible, tactile, and any other means which can be detected by the agent. An agent can be controlling a process. A process can be identified by the agent code. A process can be measured by the agent code. The loop signal can provide information about the status of the process. An agent can use a loop signal to change the process.

[0038] Codes can be fixed as in the 31A code region. Codes can be variable as in the 31B code region where part of the code light 33B comes from a variable length column which could represent temperature, pressure, fluid volume, and other variables. Here the loop signal can interact with an agent effecting the variable being represented by the column, for example by causing the agent to change heat input to change the temperature represented.

[0039] Code in a code region can include instructions to cause the imager to select light from a satellite code region. This satellite code region can include satellite code representing the status of a process. The code signal then will include a component representing the satellite code.

[0040] Code can comprise position of the code region relative to a frame of reference. Here code can also comprise motion of code region in the frame of reference. The react mode outputs a code signal which represents the position, and any changes of position, relative to the frame of reference.

[0041] In position and motion cases the loop signal can be a display of the position, and any motion. The display can be viewed by a person positioning the code region. The person can be guided by the display to position the code region to cause the displayed position, and any motion, to be as the person wants.

[0042] Locators and the corresponding codes can be anything which provides locate light and code light having the functions needed here. Both a locator and a code - and either alone - can be printed matter, can be markings on an object, and can be devices which provide locate light and code light having the functions needed here.

[0043] The react mode can view the same field of view as the locate mode. The react mode can view only the code regions in the field of view, where the field of view then is the locate mode field of view.

[0044] A locate mode can comprise a plurality of locate mode components. A react mode can comprises a plurality of react mode components. An imager can have a plurality of components, with each imager component having a locate mode component and a react mode component.

[0045] For example, there can be six locators and corresponding code regions and codes identified as C1, C2, C3, C4, C5, C6; two locate mode components identified as L1, L2; and three react mode components identified as R1, R2, R3. In the example locate mode component L1 can locate C1, C2, C3. Locate mode component L2 can
5 locate C3, C4, C5, C6. React mode component R1 can output an R1 code signal component representing codes C2, C3, C4, C5. React mode component R2 can output an R2 code signal component representing code C1. React mode component R3 can output an R3 code signal component representing codes C5, C6.

[0046] A locate mode and a react mode can be one device alternately functioning as
10 the locate mode and as the react mode. A locate mode and a react mode can be one device simultaneously functioning as the locate mode and as the react mode with locate light detected at locate mode pixels and code light being detected at react mode pixels. A locate mode and a react mode can be separate devices. A locate mode can be several devices working together, as can a react mode.

15 [0047] The field of view can comprise a plurality of component fields of view. A locate mode can sequentially view component fields of view from the plurality of component fields of view. A react mode can sequentially view component fields of view from the plurality of component fields of view. A locate mode can cause a react mode to view only field of view components containing code regions.

20 [0048] A locate mode and a react mode can sequentially view the same field of view components. Only one mode can sequentially view field of view components.

[0049] A light source adjacent to the imager can illuminate the locator, the code, and both. The locate light - and the code light - can be retro-reflected light. A light source can be scanned over the field of view, can be modulated, and can be both.

25 [0050] The react mode - and any react mode components - can comprise a first react constituent, and a second react constituent. The first react constituent detects a first code light property. The second react constituent detects a second code light property. The first react constituent and the second react constituent together cause output of the code signal.

[0051] For example, the react mode - and any react mode components - can have constituents with one sensitive to red light, one sensitive to yellow light, and one sensitive to blue light. The code signal does not need to combine code light constituents to form an image. The code signal needs only represent the code in a

5 form which can be used by an information system.

CLAIMS

Claimed is:

1. A dual mode data imaging product comprising:

an imager,

5 the imager having a field of view,

the field of view extending in each of three orthogonal directions;

a locator,

the locator being in the field of view;

locate light,

10 the locate light being from the locator;

a locate light property,

the locate light property having a preset value,

the locate light having the locate light property;

a code region,

15 the code region corresponding to the locator;

code,

the code being in the code region;

code light,

the code light being from the code region,

20 the code light representing the code;

a locate mode of the imager,

the locate mode detecting the locate light,

the locate mode detecting the locate light property,

25 the locate light property and the preset value of the locate light property having

been devised so that properties of light not from the locator detected by

the locate mode do not match the preset value of the locate light

property;

a react mode of the imager,

the react mode being caused by the locate mode to select code light over light not from the code region and to detect the code light when the locate light property detected by the locate mode matches the preset value; and

5 a code signal,
the code signal being output by the react mode, and
the code signal representing the code.

2. The product of claim 1 wherein the locator comprises a retro reflector.

3. The product of claim 1 wherein the locate mode comprises a plurality of
10 locate mode components.

4. The product of claim 1 wherein the react mode comprises a plurality of react mode components.

5. The product of claim 3 wherein the react mode comprises a plurality of react mode components.

15 6. The product of claim 1 wherein:
the field of view of the imager comprises a plurality of component fields of view, and
the locate mode sequentially views component fields of view from the plurality of component fields of view.

20 7. The product of claim 1 wherein:
the field of view of the imager comprises a plurality of component fields of view, and
the react mode sequentially views component fields of view from the plurality of component fields of view.

25 8. The product of claim 6 wherein:
the field of view of the imager comprises a plurality of component fields of view, and
the react mode sequentially views component fields of view from the plurality of component fields of view.

9. The product of claim 1 wherein the react mode comprises:

a first react constituent,

the first react constituent detecting a first code light property;

a second react constituent,

5 the second react constituent detecting a second code light property; and

the first react constituent and the second react constituent together causing
output of the code signal.

10. The product of claim 1 wherein the imager causes a loop signal
representing the code to interact with an agent associated with the code.

10 11. A dual mode data imaging product comprising:

an imager,

the imager having a field of view,

the field of view extending in each of three orthogonal directions;

a plurality of locators,

15 each Cth locator from the plurality of locators being in the field of view;

locate light,

the locate light comprising each Cth locate light from each Cth locator from the
plurality of locators;

a locate light property,

20 the locate light property having a preset value,

each Cth locate light having the preset value of the locate light property;

a plurality of code regions,

the plurality of code regions corresponding member-by-member to the plurality
of locators;

25 a plurality of codes,

at least one first code from the plurality of codes being different from at least
one second code from the plurality of codes,

each Cth code from the plurality of codes being in the member-by-member
corresponding Cth code region;

- Cth code light from each Cth code region,
each Cth code light representing the corresponding Cth code;
a locate mode of the imager,
the locate mode detecting the locate light,
5 the locate mode detecting the locate light property,
the locate light property and the preset value of the locate light property having
been devised so that properties of light not from the locator detected by
the locate mode do not match the preset value of the locate light
property;
10 a react mode of the imager,
the react mode being caused by the locate mode to select each Cth code light
over light not from the Cth code region and to detect each Cth code
light when the locate light property of the corresponding Cth locate
light detected by the locate mode matches the preset value;
15 a code signal,
the code signal being output by the react mode,
the code signal representing each Cth code in the plurality of codes.
12. The product of claim 11 wherein the locator comprises a retro reflector.
13. The product of claim 11 wherein the locate mode comprises a plurality of
20 locate mode components.
14. The product of claim 11 wherein the react mode comprises a plurality of
react mode components.
15. The product of claim 13 wherein the react mode comprises a plurality of
react mode components.
- 25 16. The product of claim 11 wherein:
the field of view of the imager comprises a plurality of component fields of
view, and
the locate mode sequentially views component fields of view from the plurality
of component fields of view.

17. The product of claim 11 wherein:

the field of view of the imager comprises a plurality of component fields of view, and

the react mode sequentially views component fields of view from the plurality
5 of component fields of view.

18. The product of claim 16 wherein:

the field of view of the imager comprises a plurality of component fields of view, and

the react mode sequentially views component fields of view from the plurality
10 of component fields of view.

19. The product of claim 11 wherein the react mode comprises:

a first react constituent,

the first react constituent detecting a first code light property;





a second react constituent,

15 the second react constituent detecting a second code light property, and

the first react constituent and the second react constituent together causing
output of the code signal.

20. The product of claim 11 wherein the imager causes a loop signal
representing at least one agent code from the plurality of codes to interact with an

20 agent associated with the agent code.

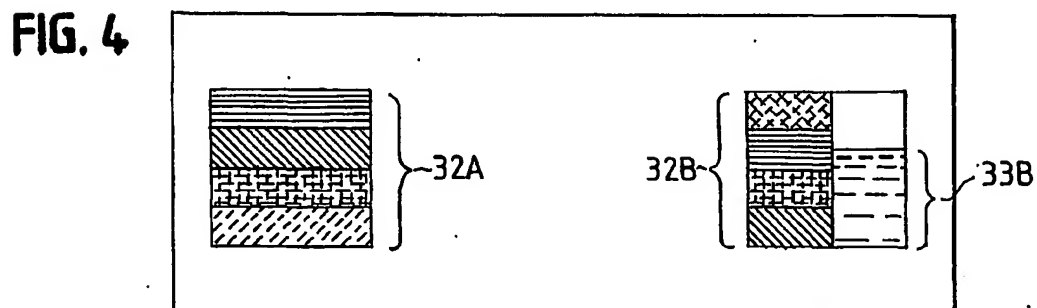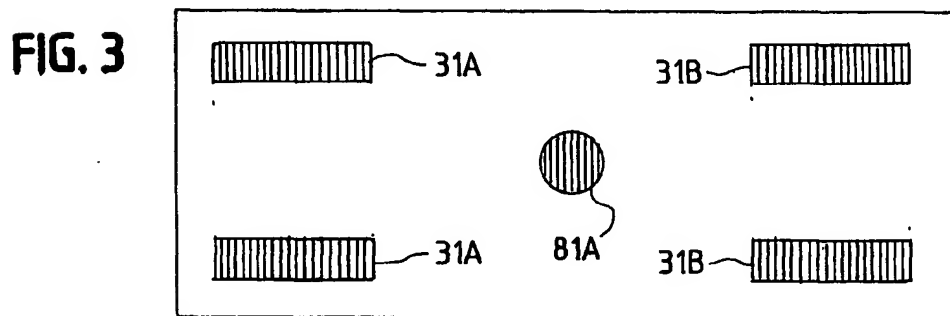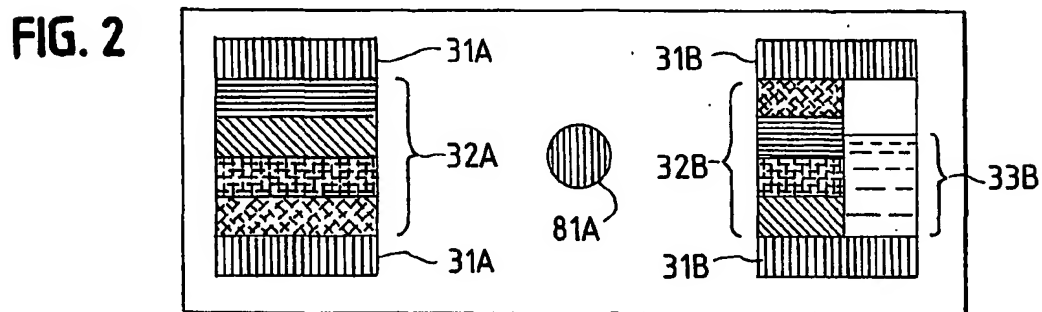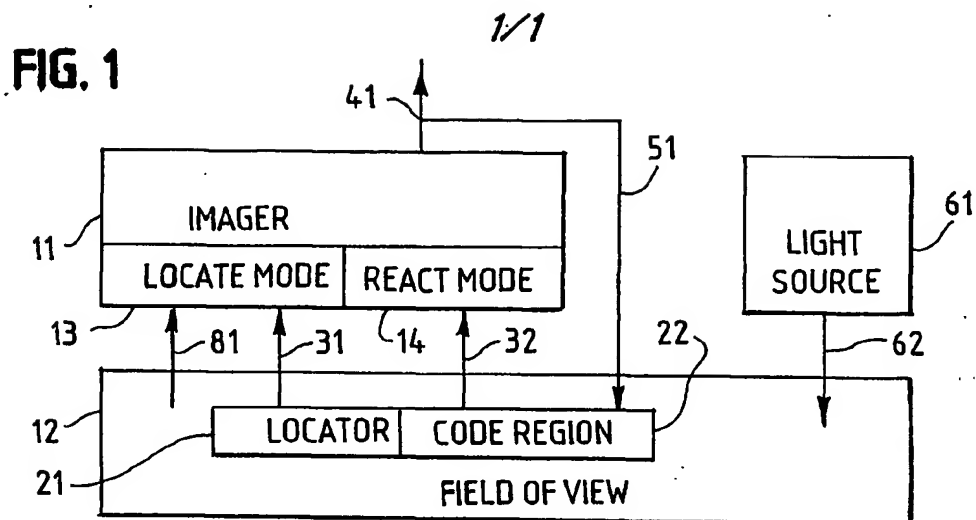

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/13742

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06K 7/10
US CL : 235/462.41

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 235/462.41, 462.20, 462.24, 462.08, 462.09, 462.10, 462.11

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
none

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
Please See Continuation Sheet

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,988,505 A (SHELLHAMMER) 23 November 1999 (23/11/99), see entire document.	1-20
A	US 6,047,893 A (SAPORETTI) 11 April 2000 (11/04/00), see entire document.	1-20
A, P	US 6,082,619 A (MA et al.) 04 July 2000 (04/07/00), see entire document.	1-20

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:

"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E"	earlier application or patent published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

05 September 2001 (05.09.2001)

Date of mailing of the international search report

11 OCT 2001

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Karl D. Frick

Telephone No. (703) 305 3491